
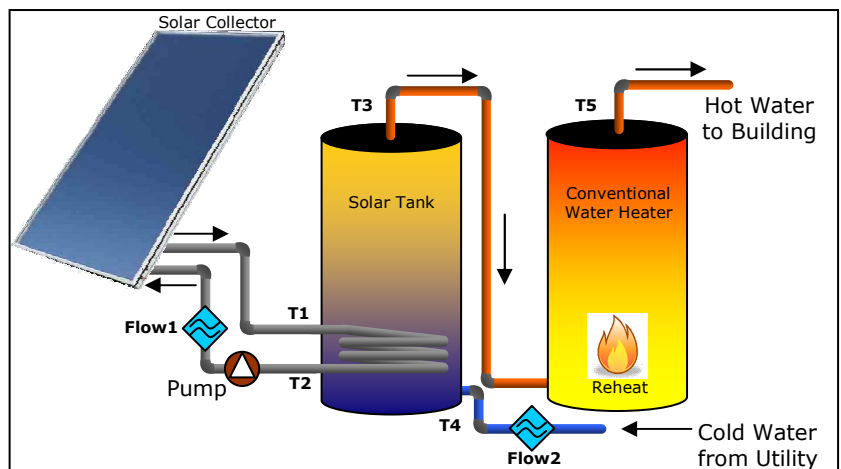


## Apollo2 Energy Monitor

Low Cost, High Function monitoring system for Solar Thermal and Solar PV installations

### FEATURES

- 6 Temperature Sensors
- 2 Flow Sensor Ports
  - Flow Meter Compatible\*
  - CT Sensors
- 1 Pressure Switch Input\*
- Ethernet to Existing Internet Connection
- Static IP or DHCP Network Config
- Email Alerts
- Full-Featured Web Interface
- Monitors Thermal AND PV

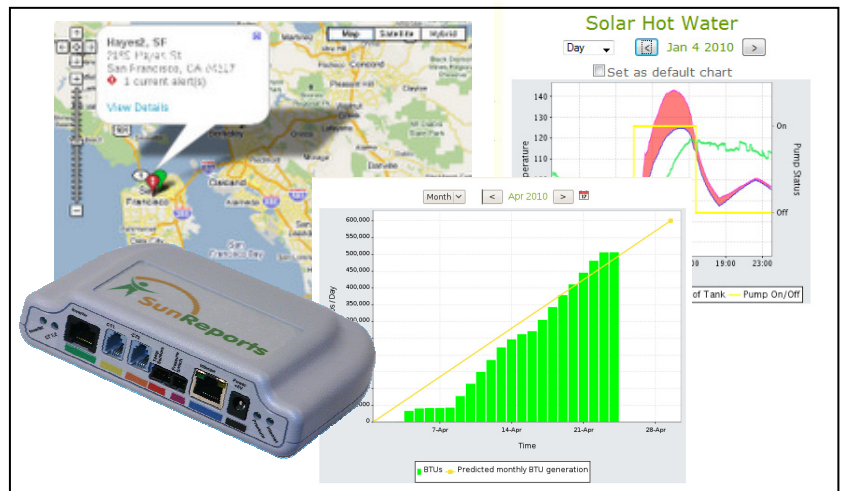

T1 – Solar Loop Heat Exchange Input  
 T2 – Solar Loop Heat Exchange Output  
 T3 – Solar Loop Top of Tank  
 Flow1 – Solar Loop Flow Sensor

T4 – Cold Water In  
 T5 – Hot Water Out  
 Flow2 – Water Loop Flow Sensor

### DESCRIPTION

The Apollo2 Energy Monitoring System has been engineered for commercial applications and provides “performance based” energy monitoring for both Solar Electric (PV) and Solar Thermal (HW) systems. The ultra-low-cost solution brings the benefits of web-based monitoring within reach for all customers. With the ‘Zero Config’ setup, installation is simple and requires no on-site configuration or networking experience. Simply plug in the sensors and connect to an existing router and the unit self-configures to begin sending data immediately. The Apollo2 automatically interfaces to the SunReports Web2.0 portal via standard Ethernet to present real-time and historical data in an easy to understand format. The SunReports design philosophy is to “make energy easy”; easy to install, easy to use, and easy to understand.

Installer and Customer web portals are accessible anywhere there is a web-browser and an Internet connection. No application software required. Access SunReports monitoring from the home, office, or around the world via any web-enabled desktop computer, laptop, netbook, or smart phone. The same unit is capable of monitoring solar PV, solar Hot Water, and solar Pool Heating systems. Installers can use the Installer Portal to monitor all their installations from one remote location.



# Apollo2 Energy Monitor

## INCLUDED

- 1 Apollo2 Device
- 1 Ethernet Cable
- 1 Inverter Cable
- 2 A/C Load Cables (CT1 & CT2)
- 1 Six-Sensor Temperature Cable
- 1 Pressure Switch Cable\*
- 1 A/C Adapter (universal input, US plug)
- Quick Start Guide

\* Pressure Switch Sold Separately

## OPTIONAL ACCESSORIES

- Communication Package including Power Line Carrier (PLC) network bridge
- Pressure Switch
- Grundfos® Flow Sensor

## SPECIFICATIONS

Input Power:

- 5VDC, 1A

AC Adapter Input:

- 100-240VAC 50/60Hz

AC Adapter Plug

- US 2-prong (others available)

Physical Dimensions:

- 5.5 x 4 x 1.4in
- (139.7 x 101.6 x 35.6mm)

Weight

- 2.1lbs (0.95kg) with cables

Housing Material:

- Flame retardant ABS plastic

Housing Rating:

- UL 94-5VA

Regulatory:

- FCC-15 Class B
- CE Mark
- C-Tick

Operating Temperature

- 0-50°C (32-122°F)

Cable Lengths:

- 14' Ethernet Cable
- 14' Inverter Cable
- 5' A/C Load Cables (CT1 & CT2)
- 9' Temperature Sensor Cable\*\*
- 4' Pressure Switch Cable
- 6' A/C Adapter


\*\* 3' common plus 6' for each sensor

## CONTACT

SunReports, Inc.

www.SunReports.com

info@SunReports.com

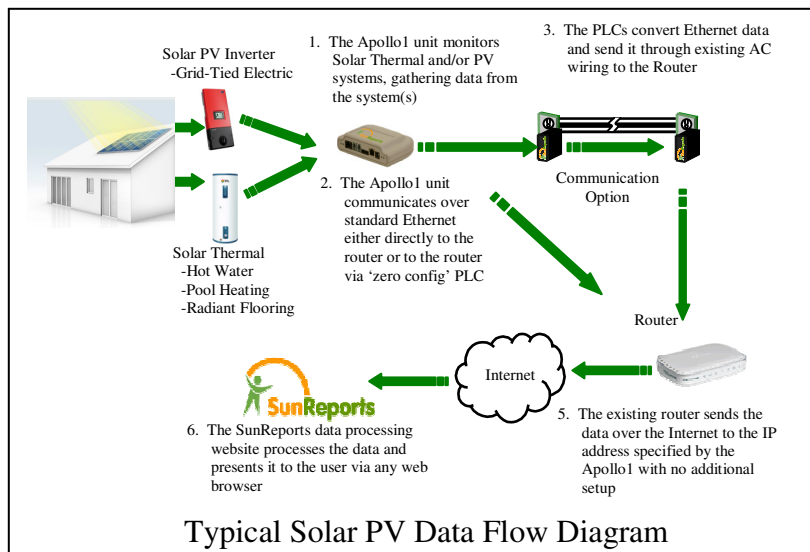

## Product Feature Comparison

Feature	Apollo1 (Residential)	Apollo2 (Commercial)
Modular Sensors	X	X
Thermal Monitoring	X	X
PV Monitoring	X	X
Internet Connectivity	X	X
Single Thermal Loop Monitoring	X	X
3 Temperature Sensors	X	X
Pump On/Off Detect (AC Detect)	X	X
DHCP Network Support	X	X
Pressure Switch Compatible	X	X
Local LED Indicators	X	X
Wall Mount	X	X
Double Thermal Loop Monitoring		X
6 Temperature Sensors		X
Flow Meter Compatible		X
Static IP Network Support		X
Weather Resistant Housing		X
Pole Mount		X
<b>On-Line Reporting</b>		
Secure Login	X	X
Installer Portal	X	X
User Portal	X	X
Historical and Current Data	X	X
Configurable Alerts*	X	X
Interactive Google Maps*	X	X
Predicted vs. Actual Charts*	X	X
Single BTU Calculation	X	X
Energy Equivalence Display	X	X
Double BTU Calculation*		X
Thermal Loop Comparison Chart*		X

\* Installer Portal Only