

MOUNTING CLIP  
 STAINLESS STL BOLT WITH WASHER  
 S.S. NUTS & WASHERS

HOLE 2X BOLT DIA.

CLAY OR CONCRETE TILE ON BATTEN OVER ROOFING FELT ON ROOF DECK SHEATHING ON ROOF FRAMING SYSTEM - BEAM OR RAFTER


BLOCK BETWEEN RAFTERS FOR HANGER BOLT ATTACHMENT IF RAFTER SPACING DOES NOT MATCH HANGER BOLT SPACING

SEE DETAIL A

ANODIZED ALUMINUM SOLAR STRUT  
 ROOFING SEALANT  
 12 x 12 LEAD FLASHING

STAINLESS STL FLATWASHER LAG BOLT SET IN SEALANT

- \* LENGTH & DIA. VARY WITH INSTALLATION
- \* DRILL PILOT HOLE 3/4 OF SCREW DIA.

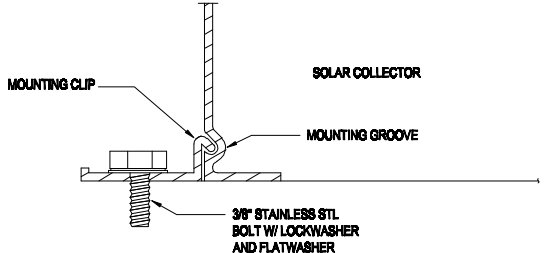

DETAIL A



REVISIONS

TITLE BLOCK PROJECT: <b>TILE MOUNTING HARDWARE</b> DRAWN BY: <b>GENIUS</b> CHECKED BY: <b>GENIUS</b> DATE: <b>0</b>		SCALE: <b>1" = 1'-0"</b> SHEET NO: <b>0</b>	DRAWN BY: <b>GENIUS</b> CHECKED BY: <b>GENIUS</b> DATE: <b>0</b>
---	--	--	--